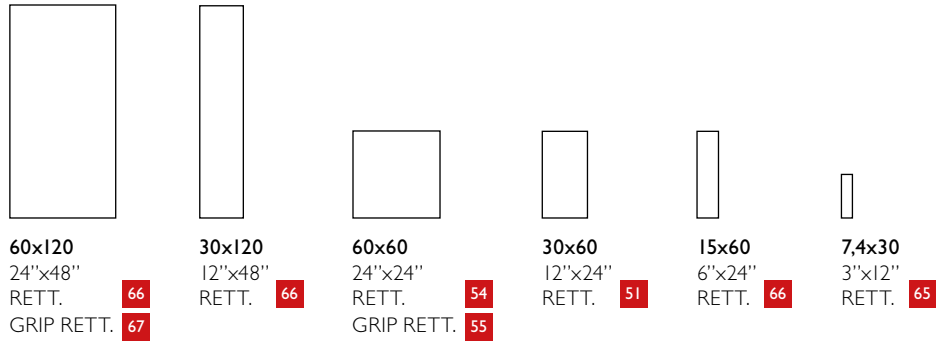


TECHNICAL INFORMATION & PLUS

FORMATI - SIZES



DECORI - DECORS







MOSAICO

HEXAGON

RELIEF

30x30 12"x12" 115	25x34 10"x13" 34	30x60 12"x24" 59
-----------------------------	----------------------------	----------------------------

PEZZI SPECIALI - SPECIAL ITEMS

GRADINO
RETTIFICATO | GRIP30x60
12"x24" **33**30x60
12"x24" **34**ELEMENTO A L
RETTIFICATO | GRIP30x60x5
12"x24"x2" **49**30x60x5
12"x24"x2" **50**GRADONE COSTA RETTA
RETTIFICATO | GRIP30x60x4
12"x24"x12/3" **115**30x60x4
12"x24"x12/3" **118**BATTISCOPA SMALTATO
RETTIFICATO7x60
3"x24" **15**GRADONE ANGOLARE COSTA RETTA
RETTIFICATO | GRIP30x30x4
12"x12"x12/3" **118**30x30x4
12"x12"x12/3" **120**

CARATTERISTICHE TECNICHE - TECHNICAL FEATURES

	standards	characteristics or properties	declared values
	ISO 10545-3	assorbimento d'acqua water absorption	<0.5%
	ISO 10545-4	resistenza alla flessione (R) breaking strength	35 N/mm ²
	ISO 10545-13	resistenza agli acidi resistance to acid	GLA
	ISO 10545-12	resistenza al gelo frost resistance	resiste frost proof
	ISO 10545-14	resistenza alle macchie stain resistance	4
	ISO 10545-2	planarità surface flatness	±0.5%
		spessore thickness	9 mm
	DIN 51097 DIN 51130 DCOF BOT3000	coefficiente d'attrito (scivolosità) static coefficient of friction	A R10 >0.42
	DIN 51097 DIN 51130 DCOF BOT3000	coefficiente d'attrito (scivolosità) static coefficient of friction	A+B R11
		variazioni cromatiche color shade	V2 variazione leggera V2 slight variation
		ortogonalità orthogonality	±0.6%

IMBALLI - PACKING

mm inch		spessore thickness	pezzi/sc pcs/box	mq/sc sqm/box	kg/sc kgs/box	sc/pl box/pal	mq/pl sqm/pal	kq/pl kgs/pal
60x120 24"x48"	rettificato grip	9	2	1,44	28,65	30	43,20	859,50
30x120 12"x48"	rettificato	9	3	1,08	21,40	24	25,92	513,60
60x60 24"x24"	rettificato grip	9	3	1,08	20,70	40	43,20	828,00
30x60 12"x24"	rettificato	9	6	1,08	19,68	40	43,20	787,20
15x60 6"x24"	rettificato	9	12	1,08	20,70	48	51,84	993,60
7,4x30 3"x12"	rettificato	9	42	0,93	17,90	60	55,80	1074,00
30x60 12"x24"	decoro Relief	6	1,08	19,68	40	43,20	787,20	
30x30 12"x12"	mosaico	11	0,99	16,80	36	35,64	604,80	
25x34 10"x13"	hexagon	6		9,48				
7x60 2 3/4"x24"	battiscopa smalt. rett.	12		9,72				
30x60 12"x24"	gradino rett. grip	8		31,60				
30x60 12"x24"	gradone costa retta rett. grip	4		19,40				
30x30 12"x12"	gradone ang. costa retta rett. grip	2		4,40				
30x60 12"x24"	elemento ad L grip	4		17,20				

FUGHE - JOINT - JOINT - FUGE

per materiale rettificato prevedere una fuga di almeno 2 mm sul monoformato e necessariamente 3 mm sul multiformato
 por rectified material, we recommend a 2 mm grout at least when using one size only and a 3 mm grout for multisizes laying solution
 pour le matériel rectifié prévoir un minimum de 2mm de joint et 3mm pour la pose multiformat
 fuer rettifiziertes material-monoverlegung wollen sie bitte eine fuge von 2 mm vorsehen – fuer modulverlegung eine fuge von 3 mm